



Flip Window (Non-Bullet Resistant)

The Flip Window is designed to allow less entry of outside air into the building than normal sliding window. The window pivots for easy opening and closing. When open the front edge of window extends out only 8.5" from sill. Flip window mounts between mullions for retrofit.

Choice of glazing .25" Lexan or .25" tempered glass. The window locks with spring loaded dead bolt and has brush type weatherstrip.

Specify frame finish:


Clear or dark bronze anodized aluminum

Standard size:

21.75" wide x 21" high overall with a clear opening of 15.5" x 17.5" high
Custom sizes are available

Choice of glazing:

.25" Lexan or .25" tempered glass

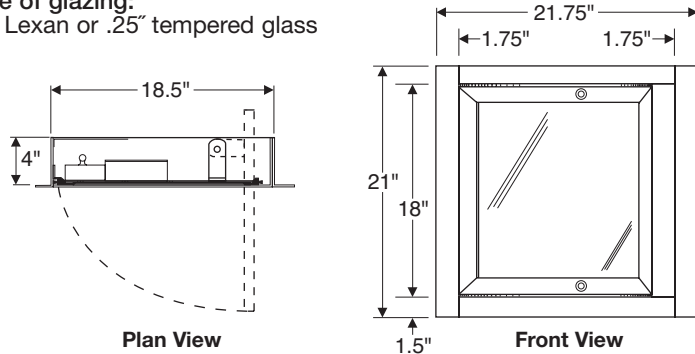

Flip Window with Transom (Non-Bullet Resistant)

For new construction or retrofit, this unit can replace moveable section of existing sliding window, reducing the size of the window which opens to the customer. Custom sizes and configurations available upon application.

Standard size:

24" wide x 36" high overall



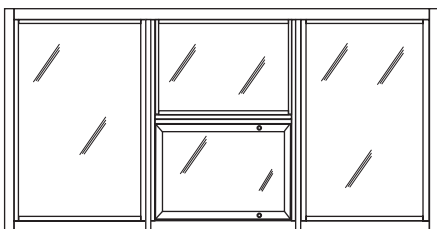


Illustration of Flip Window with transom shown between two side lites.

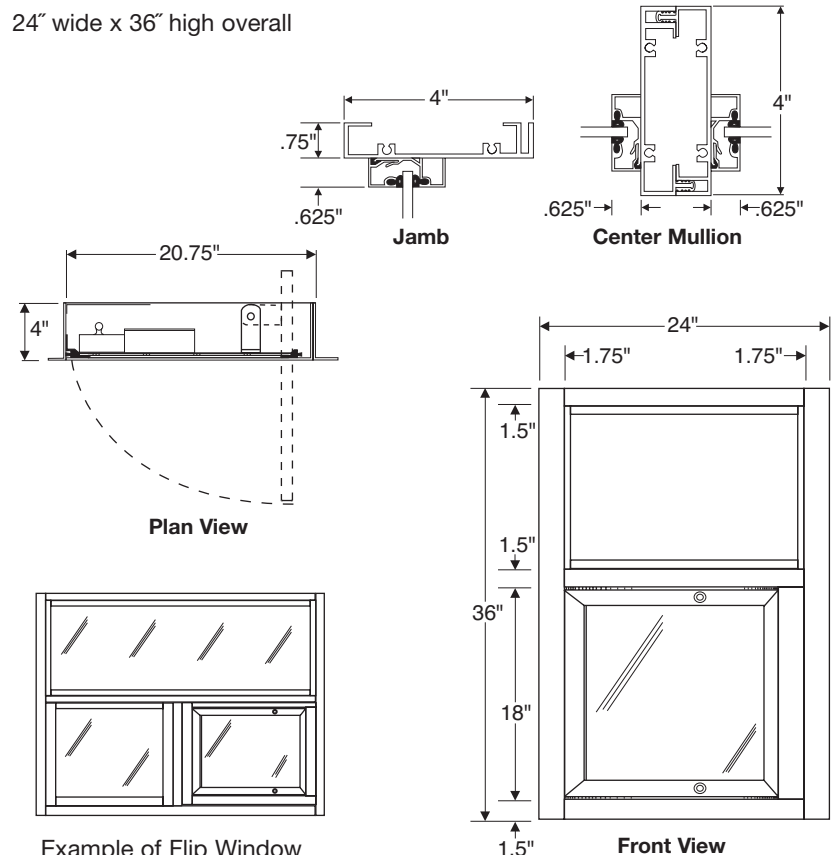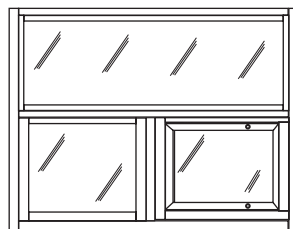

Example of Flip Window below full width transom.